



SAFFROKOL™

GROUT PRO MIX GT-1

Technical Data Sheet



Strengthens
Grout



Color
Fastness



Built for
durability



Reduce water
absorption



Improving
performance



Easy to mix
and apply

PRODUCT DESCRIPTION

Grout Promix is a special additive designed to improve the strength, durability, and performance of Tile Grout-350. This white polymer emulsion increases flexibility, making the grout more resistant to water, stains, and heavy loads. It also helps fill wider joints between tiles and stones. When mixed with Tile Grout -350, Grout Promix creates a strong, long-lasting grout that works well for both wet and dry areas on walls and floors, with joint widths of up to 6 mm.

BENEFITS

- Highly flexible, allowing for better movement and crack resistance.
- Strengthens grout
- Reduce water absorption
- Easy to mix and apply
- Color Fastness
- Built for durability
- Improving performance and adhesion

SUITABLE FOR


- Compatible with all types of tiles and stones & versatile application.
- Ideal for ceramic, vitrified, and large-format tiles.
- Works good with glazed, porcelain, and glass mosaic surfaces.
- Suitable for natural stones, providing a strong and lasting bond.

INSTALLATION GUIDE

1. Surface Preparation:

Make sure the surface is completely dry, clean, and free from dust or adhesive residue.

- Wait at least 24 hours after fixing tiles before starting the grouting process.
- Remove any tile spacers and check the adhesive is fully set.
- There should not be excess moisture in the joints and shake the bottle well before use.

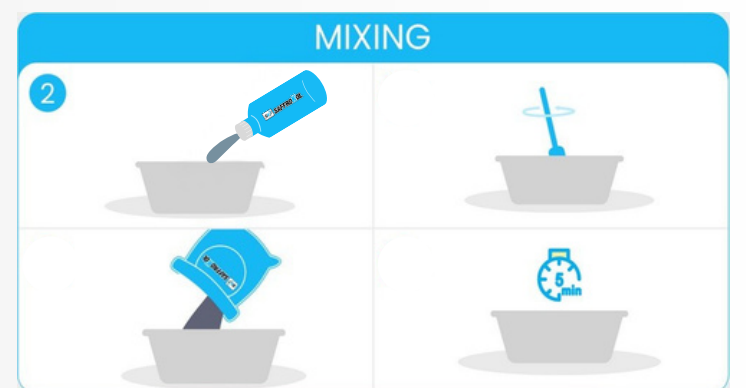

Mixing Ratio

- Achieving the right consistency is very important for a smooth and durable grout application. Follow the recommended mixing ratio.
- 200ml of admix per 1kg of grout powder.

How To Apply

- Shake the bottle thoroughly before use to maintain uniform consistency.
- Pour the required amount of admix into a clean mixing container.
- Gradually add the grout powder while mixing to prevent lumps.
- Stir continuously until the mixture reaches a smooth, uniform consistency.
- Allow the mixture to rest for 5 minutes for proper hydration.
- Briefly remix the grout before beginning the application process, after that you will get a high-quality, durable grout application.

SHELF LIFE

When stored in a cool, dry place, a factory-sealed bottle of Grout Promix for Tile Grout – 350 stays fresh and effective for up to 24 months.


SAFETY GUIDELINES

- Keep this product out of reach of children. Avoid direct contact with your eyes and skin. If it gets into your eyes, rinse thoroughly with water and get medical help if needed.
- Always wear protective gloves and safety glasses while using this product. Do not ingest. If swallowed, do not induce vomiting—seek medical attention immediately.
- Store in a cool, dry place, and make sure to tightly close the container after each use to keep the product safe and fresh completely.



BO: Pankaj Petrochem Consultancy LLC

Licence no. # 2428700, Shams Business Center, Sharjah Media City Freezone, Al Messaned, Sharjah (Dubai) UAE

 Toll Free : 1800-202-732
Call : +91-8607650126

 info@saffrokol.com

 www.saffrokol.com

PANKAJ PETROCHEMICAL PVT. LTD.
(AN ISO : 9001, 14001 : 2015 CERTIFIED COMPANY)

Address: Jind Road, VPO Titoli, RTK, HR,
124001